
BIRD & CRONIN INC.



TO PREVENT BELT SLIPPAGE, PLEASE FOLLOW DIRECTIONS CAREFULLY

- Webbing must be inserted under male component of buckle, serrated edge up, through slot "A", loop over serrated edge and down through slot "B".
- 2. Adjust belt by pulling strap through loop "B". Once adjusted, hold both loose strap and belt strap together for added security.
- 3. Buckle should be positioned in the middle of patients waist to eliminate possibility of webbing pulling perpendicular to the buckle.

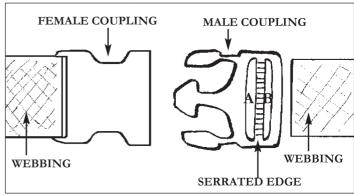

Designers and Manufacturers of Quality Medical Products

1200 Trapp Road • Eagan, Minnesota USA 55121

800/328-1095 • Fax 800/279-7934 • 651/683-1111 • Fax 651/688-9855

10006452